





DIGI SET TAP TIMER INSTRUCTION MANUAL

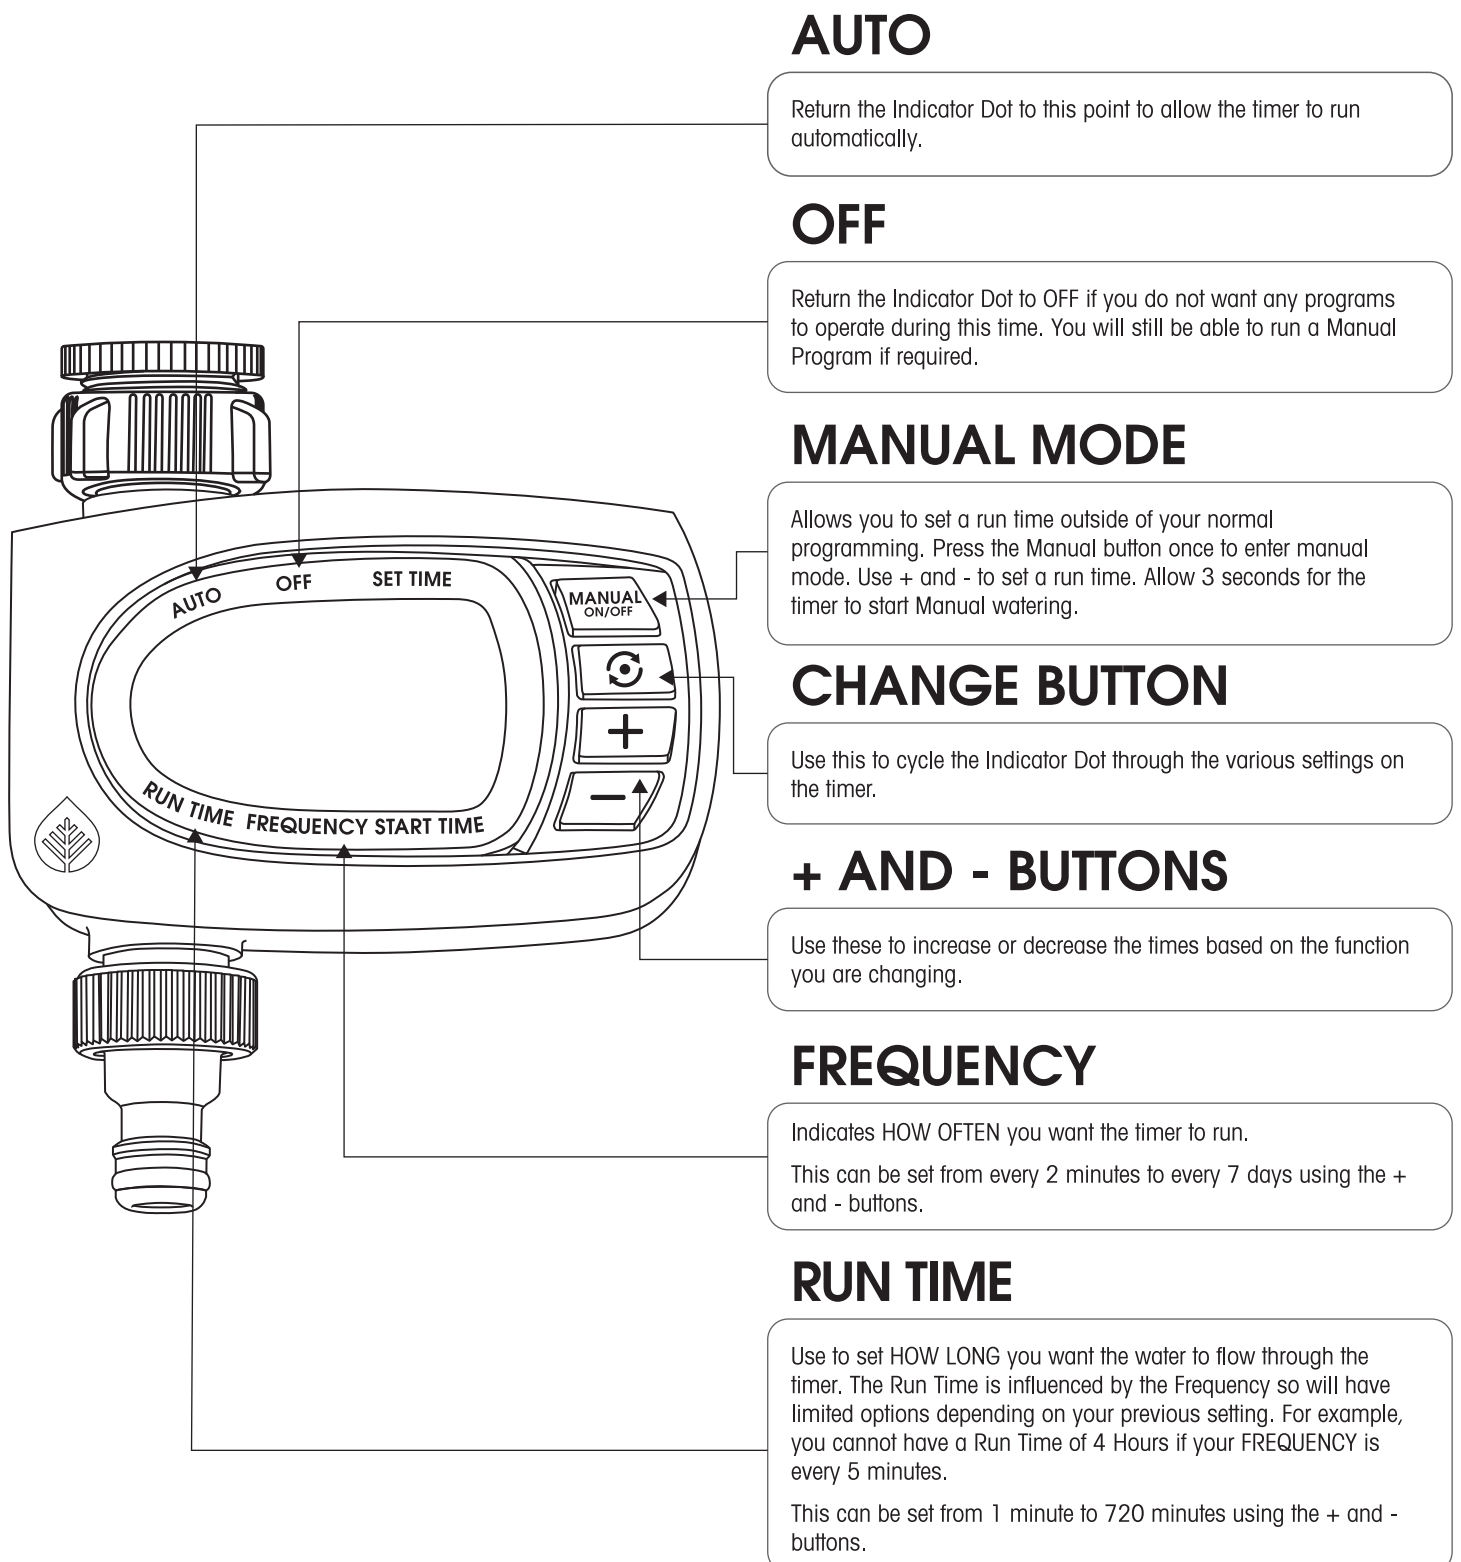

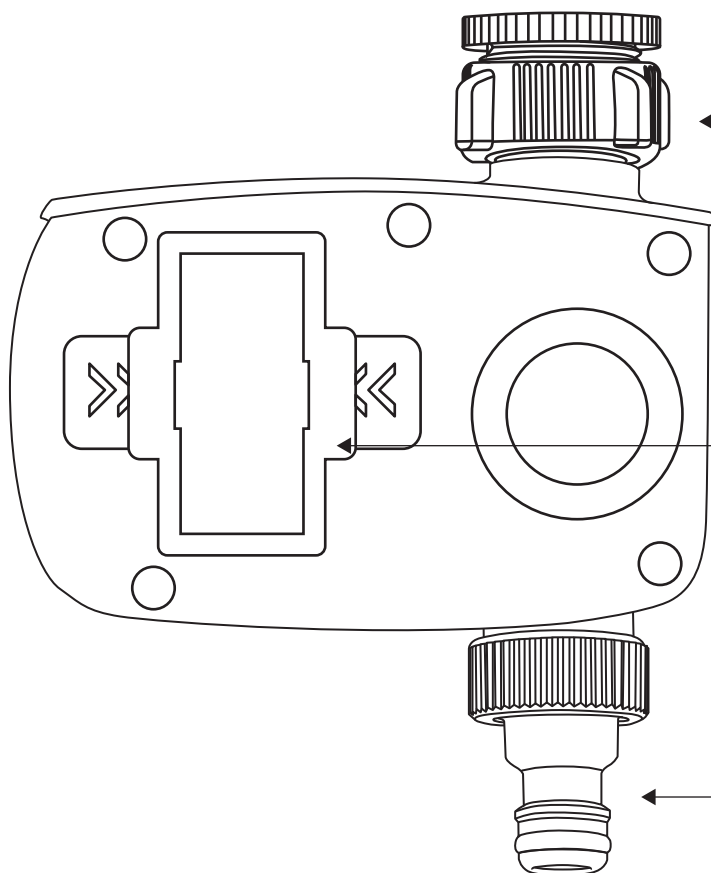

TAP FITTING

The timer comes with a 25mm Inlet and a 20mm Reducing bush. Depending on the size of your tap, you may not need the reducing bush.

The Tap Connection also has a filter installed. This is to stop the debris from entering the valve mechanism. **DO NOT REMOVE THIS.**

BATTERY

The timer takes 2 x AA batteries. The timer has not been tested with Li-Ion or rechargeable batteries. Pope cannot guarantee operation with these batteries.

HOSE CONNECTION

This connection is used to connect to a standard 12mm Snap On fitting. The fitting can be removed and a Nut & tail piece can be added to run Poly Tube direct to an irrigation system. You can also connect Pressure Reducers or Filters direct to the timer once this piece is removed.

This product is not suitable for use:

- For commercial applications
- If you use bore or unfiltered water
- If you use any kind of pump to draw water
- If the water pressure is unstable

We recommend testing your home water pressure before fitting the Pope Digi Set Tap Timer

Recommend Operating Pressure: 10-800kPa

In higher pressure areas, use a pressure reducer from the tap. Product failure where the maximum pressure rating is exceeded will void all warranties.



popeproductsaustralia

Pope® is a Registered Trademark of
AMES Australia Pty Ltd
 1/660 Doncaster Road, Doncaster VIC 3108
 pope@amesau.com | 1300 134 880
www.gardeningwithpope.com.au

